

Product description

Automatical dosing of adhesives or sealing materials.
 Freely programmable for dispensing dots, lines, arcs and combinations, executable with PC.
 Installation of various security-equipments possible as well as embedding into an external safety circuit.
 The machine can be integrated in an already existing system.
 Therefor a communication with external controllers is possible.

Technical description

- 3D Interpolation of axes.
- Triggering of electrical dispensing valve via 4th. axis.
- Positioning accuracy in X und Y = 0,1 mm, in Z = 0,05 mm
- Movement speed up to 400 mm/s
- Axes workload up to 3 kg, optional up to 7 kg
- 12 Inputs / 12 Outputs
- Programmable with software or import of CAD data (hpgl.files)
- Working range: (x)600 (y)480 (z)100 mm
- Size: (W)980 (D)990 (H)610 mm
- Weight depending on equipment




(Similar illustration)

Options:



3001 Sub-structure

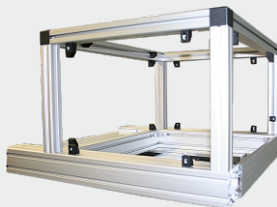


3101 Hood-Extension



1523 Needle-sensor



2510 Purging unit

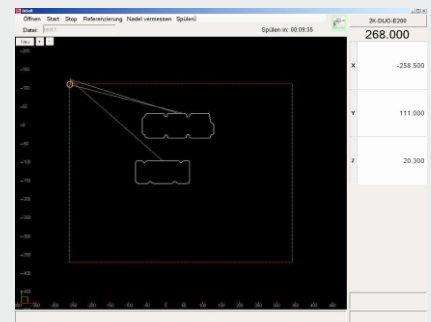

0002 Software DiSoft